




ROLLALONG PERMANENT MODULAR CONSTRUCTION

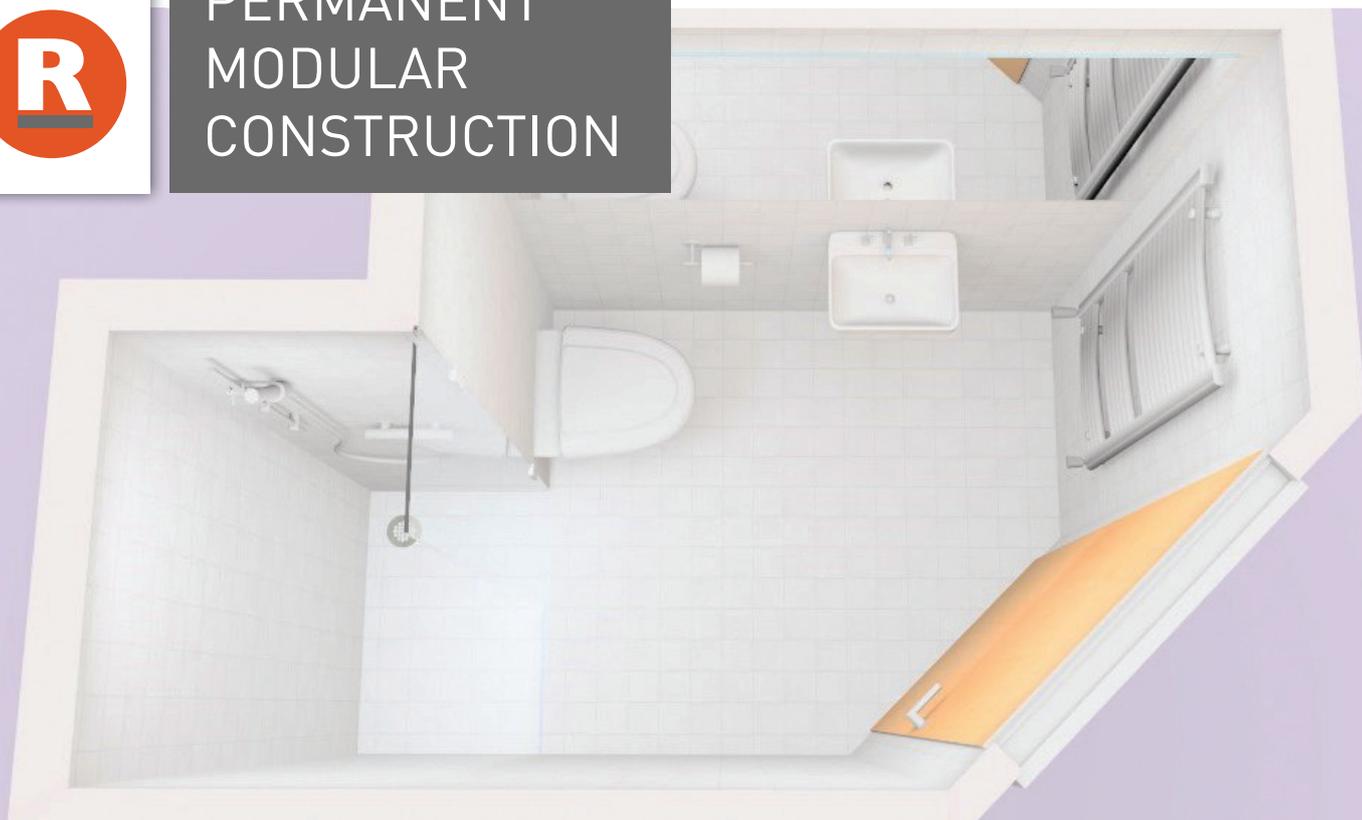

Marine LSF Shower Pod

The Marine LSF is ideal for new build projects and is aimed primarily at the military accommodation market. The Marine LSF features a robust steel frame construction together with a traditional tiled interior.

The Marine's LSF bathroom pod construction consists of robust 1.5mm thick cold rolled galvanised steel 'C' and 'U' sections to form the wall frames, fixed to a rigid welded box section base frame incorporating lifting lugs. Internally, the walls are typically double boarded with OSB3 and moisture resistant plasterboard and the floors boarded with 22mm WBP plywood and overlaid with a sound attenuation material. Ceilings can be constructed in Fermecell or Composite GRP to suit a range of applications. The internal walls are finished with ceramic tiles and the floors are offered with either ceramic tiles or vinyl flooring with coved upstands and trims.



ROLLALONG
PODS

