



# ROLLALONG PERMANENT MODULAR CONSTRUCTION



## Devon Composite GRP Shower Pod

**The Devon is ideal for new build and refurbishment projects and is aimed primarily at the student accommodation market. The Devon is low maintenance, durable, easy to clean and lightweight.**


The Devon's Composite GRP construction consists of a modular panel system, to ensure that walls and door openings are vertical and plumb, with a fully bonded floor which is fixed to a rigid welded box section base frame incorporating lifting lugs. The panels are moulded from marine grade resins and incorporate a lightweight fully compatible core material for added rigidity and strength. The internal finish to the walls is an integral realistic 'tile effect' which offers improved aesthetics without the disadvantages of conventional tiles and grout.

As the Devon is constructed using modular panels, it is also suitable for refurbishment of existing buildings as the panels can be supplied in flat pack kits for easy handling and assembly on site.



## DIMENSIONS

Overall Height:	2310mm
Overall Width:	1535mm
Overall Length:	2110mm

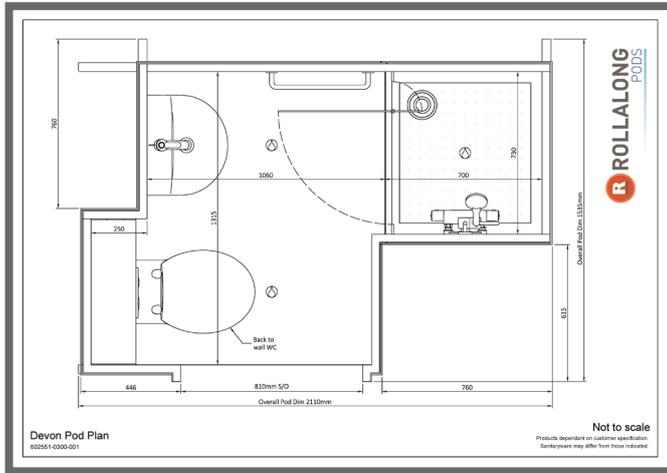

To speak to one of our pod specialists please call 01202 824541

## STANDARD SPECIFICATION

### Sanitaryware

WC pan	-	Back to Wall white pan
WC seat	-	White plastic to suit
Cistern	-	Concealed 6/4 litre flush
Flush plate	-	Dual flush chrome
Wash basin	-	Wall hung 50cm white
Shower tray	-	Integral moulded GRP

### Brassware

Basin tap	-	Single lever mixer tap chrome
Basin waste	-	Flip waste chrome
Basin trap	-	75mm seal bottle trap chrome
Shower valve	-	Bar thermostatic shower valve chrome
Shower head	-	Hand shower, hose and riser rail kit chrome
Shower waste	-	50mm seal top access shower trap chrome

### Fixtures & Fittings

Toilet roll holder	-	Single arm chrome
Towel rail	-	450mm single towel rail chrome
Vanity top	-	Solid surface cistern cover
Mirror	-	815 x 535mm safety backed mirror, polished edges, dome fixing screws
Shower door	-	Framed pivot door in silver

### Electrics & Extraction

Lighting	-	3 off IP65 rated downlighters with LED lamps chrome
Shaver socket	-	Dual voltage shaver socket white
Wiring	-	LSF wiring terminated in 3m cable coils in riser area
Extraction	-	100mm plastic air valve

### Plumbing

H&C pipework	-	16mm Uponor MLCP press fit plastic pipe - uninsulated
Waste pipework	-	110mm PVC-U WC waste; 40mm ABS solvent weld basin & shower wastes

### Floor Vinyl

Floor Vinyl Inlay	-	Altro Contrax
-------------------	---	---------------