




ROLLALONG PERMANENT MODULAR CONSTRUCTION



Wiltshire LSF Shower Pod



The Wiltshire is ideal for new build projects and is aimed primarily at the care home market. The Wiltshire features a robust steel frame construction together with a traditional tiled interior.

The Wiltshire's LSF bathroom pod construction consists of robust 1.5mm thick cold rolled galvanised steel 'C' and 'U' sections to form the wall frames, fixed to a rigid welded box section base frame incorporating lifting lugs. Internally, the walls are typically double boarded with OSB3 and moisture resistant plasterboard and the floors boarded with 22mm WBP plywood and overlaid with a sound attenuation material. Ceilings can be constructed in Fermecell or Composite GRP to suit a range of applications. The internal walls are finished with ceramic tiles and the floors are offered with either ceramic tiles or vinyl flooring with covered upstands and trims.

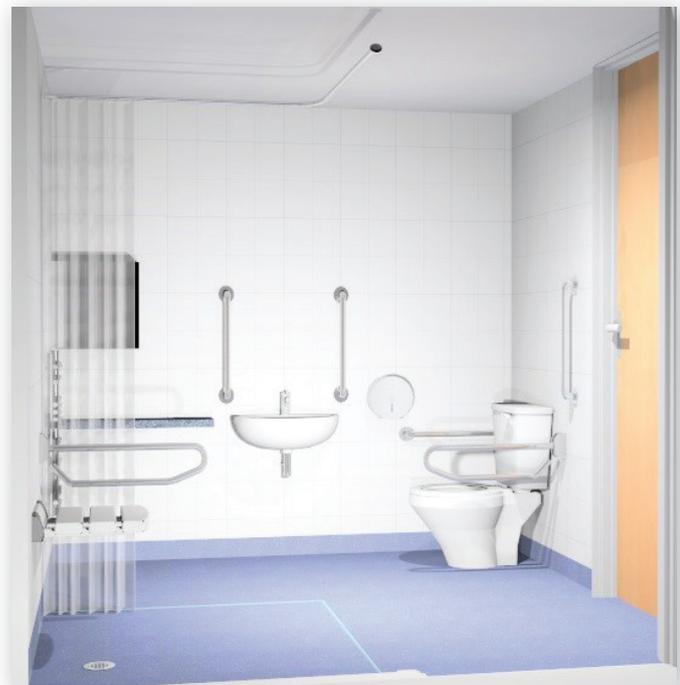

DIMENSIONS

Overall Height:	2500mm
Overall Width:	2500mm
Overall Length:	2600mm

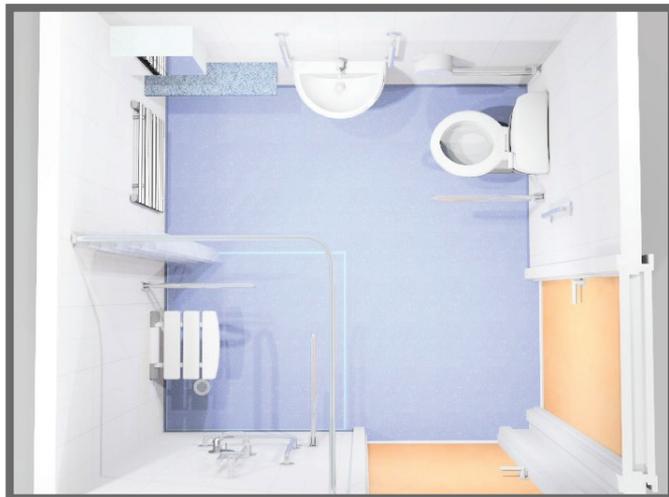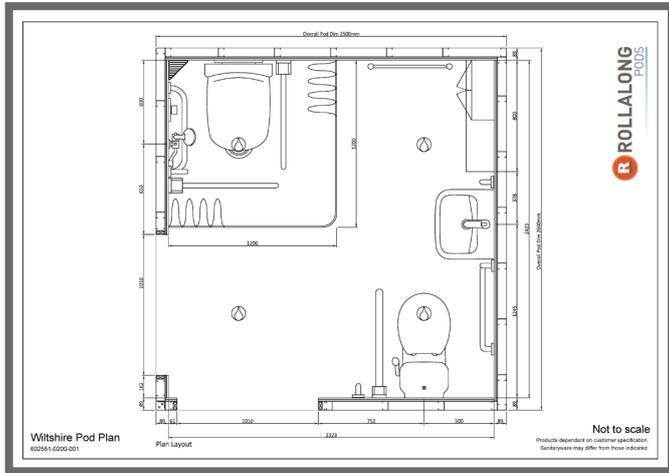

To speak to one of our pod specialists please call 01202 824541

STANDARD SPECIFICATION

Sanitaryware

WC pan	-	Close coupled washdown pan
WC seat	-	White plastic to suit
Cistern	-	Concealed 4/2.6 litre flush
Flush plate	-	Dual flush chrome
Wash basin	-	55cm white basin with full pedestal
Shower tray	-	1200mm x 1200mm wetroom shower tray

Brassware

Basin tap	-	Single lever mixer tap chrome
Basin waste	-	Flip waste chrome
Basin trap	-	75mm seal bottle trap chrome
Shower valve	-	Concealed TMV3 thermostatic shower valve chrome
Shower head	-	Hand shower, hose and riser rail kit chrome
Shower waste	-	50mm seal top access shower trap chrome

Fixtures & Fittings

Toilet roll holder	-	Single arm chrome
Shower rail	-	1200mm x 1200mm white L-shaped curtain rail
Towel rail	-	600mm straight towel rail chrome
Mirror	-	950 x 800mm safety backed mirror, polished edges, dome fixing screws
Shower seat	-	Wall mounted fold up padded seat with legs
Grab rails	-	Heavy duty plastic fluted grab rails; 6 off straight, 3 off hinged

Electrics & Extraction

Lighting	-	4 off IP65 rated downlighters with LED lamps chrome
Shaver light	-	Dual voltage low energy shaver light above mirror
Heated towel rail	-	Low surface temperature heated towel rail chrome
Wiring	-	LSF wiring terminated in 3m cable coils in riser area
Extraction	-	100mm plastic air valve

Plumbing

H&C pipework	-	16mm Uponor MLCP press fit plastic pipe - uninsulated
Waste pipework	-	110mm PVC-U WC waste; 40mm ABS solvent weld basin & shower wastes